




Front VIEW

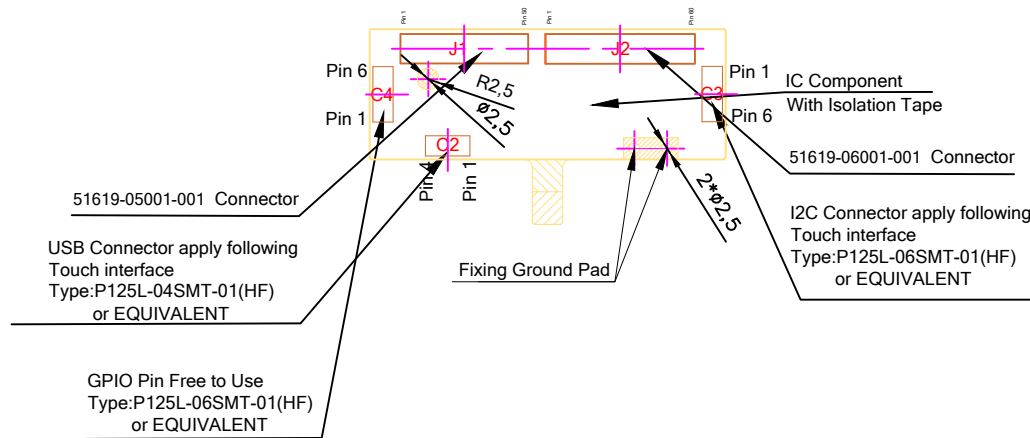

Back VIEW

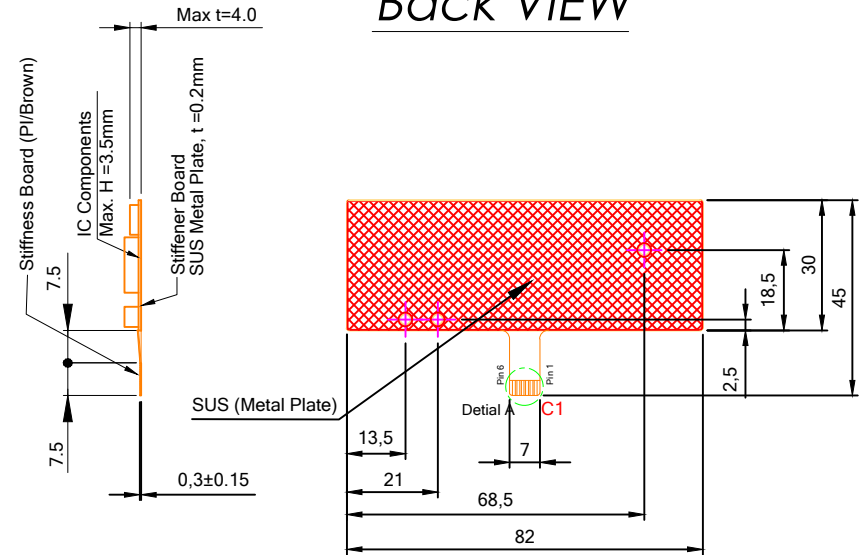

C1:USB		C2: USB Connectr 4 pin		C3: I2C Connectr 6 pin		C4: TP_EN&GPIO Connectrs 6 pin	
Pin 01	XGND	Pin 01	GND	Pin 01	XGND	Pin 01	TP_EN
Pin 02	D-	Pin 02	D-	Pin 02	SDA	Pin 02	GPIO
Pin 03	D+	Pin 03	D+	Pin 03	SCL	Pin 03	GPIO
Pin 04	VDD(5V)	Pin 04	VDD	Pin 04	VDD(5V)	Pin 04	GPIO
Pin 05	NC			Pin 05	INT	Pin 05	GPIO
Pin 06	RSTN			Pin 06	RSTN	Pin 06	GPIO

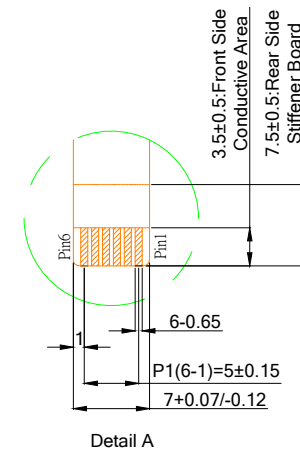

- Note:**
1. For connecting USB/I2C connector can be applied with compatible cable line or RT standard cable kit.
 2. 3 Ground Pad was applied with fixing mechanical screw hole.
 3. C4 connector was applied for special feature from customer request by GPIO setting.

Customer Approval		Part Number		RTBRD-R1-01-C	
Date		Rev	Date	Person	Description
Company		v2	20220407	Jeff	Remove Unnecessary Information
Name		v1	20180708	Jeff	Change Pin Out Stiffness Board Description
Signature		Date	Design By	Date	Check By
		20180522	Jeff		Approved By
First Drawing					